

## MNML 立式砂辊米机

MNML 系列立式砂辊碾米机，是本公司引进最先进的立式米机技术结合本公司碾米机研究成果，根据本国国情采用现代工艺和国际化配置，精心策划、精心设计、精心创造的新一代碾米机械，是碾米工厂碾米工序最先成熟的设备。


### 特点

- 采纳国际标准，选用进口元件，采用先进制造工艺，创造出新一代美观、耐用的新型米机。
- 碾米机内的耐磨件达到国际水平，耐用，少维修。
- 装有电流和负压显示及多位风门调节装置，使用方便可靠。
- 立式米机为上进料下出料结构，砂辊为间隙式环形叠加结构，使加工的大米增碎少、排糠易、米中糠粉少。
- 互成 120° 的三片米刀调节装置，加工中可调整，大米剪精度高、增碎少。

Designed in the light of the specific local conditions in China as well as incorporated overseas the most modern techniques of rice milling, MNML vertical emery roll whitener are proven to be perfect rice processing equipment for rice milling plant.

### Feature

- Good appearance and durable, with adopting international standard, imported parts, advanced manufacturing technology.
- Wear parts have met international standards, durable and less service.
- Equipped with current and negative pressure indicator and multiposition air gate adjustment as well, convenient touse and reliable.
- Adopt the construction of under-side feed and top discharge; emery roll is designed to be superposable configurations; with less broken rice increment, easy bran discharge, less bran content in rice.
- Use huller blade adjustment, huller blade assuming the form of three positions and 120 one another; can be adjustable in the processing; with high rice degree, less broken rice increment.

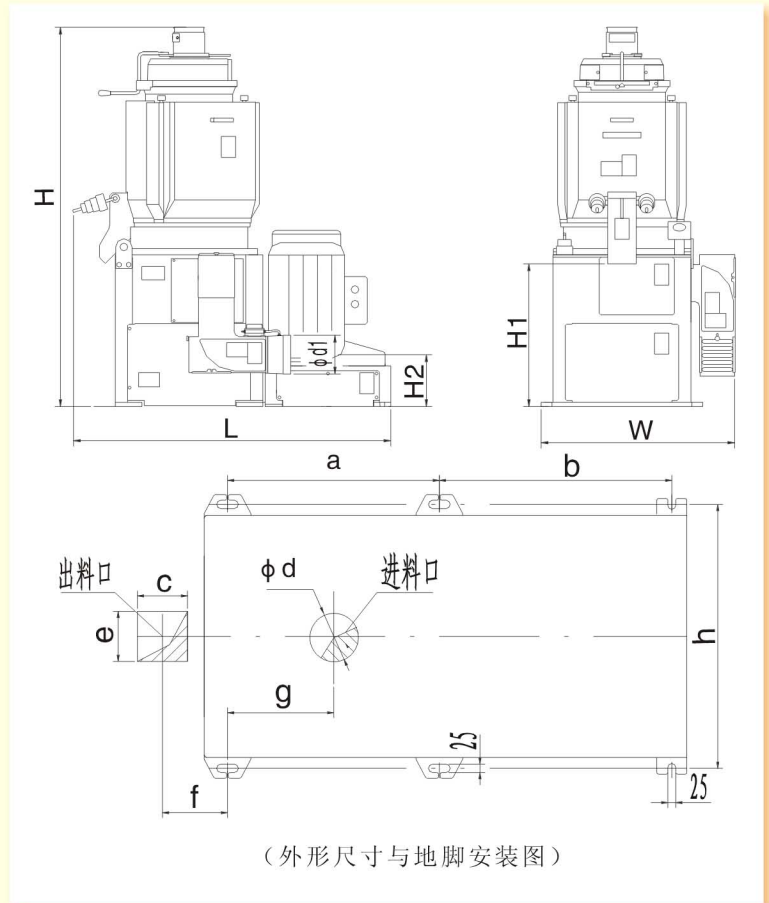

参数项目 型号	L	W	H	H1	H2	a	b	c	φ d	φ d1	e	f	g	h
MNML30	1484	920	1735	655	550	545	657	40	φ 130	φ 200	130	130	272	690
MNML40	1665	1028	1990	755	275	635	697	40	φ 150	φ 200	150	130	330	790

## 主要技术参数

型号type	MNML40	MNML30
处理量output (T/h)	4.0 ~5.0	3.0 ~4.0
动力配备power (Kw)	37~45	30 ~37
外型尺寸 mm (L×W×H)	1665×1028×1990	1484×920×1735
机重 (不含电机) weight (Kg)	≈ 1200	≈ 1000

### 通过ISO9001国际标准质量体系认证

E-mail: yongxiangmiji@sohu.com    http://www.hbyxlj.com

地址：湖北省安陆市府河大道8号

ADD: 8 FUHE AVE. ANLU CITY, HUBEI, CHINA

电话(TEL): 0712-5254443 5254445 5258762    传真(FAX): 0712-5254443    邮编(POSTCODE): 432600